




PANEL FASTENERS

For the use in modern fabrications panel fasteners comes in all different shapes, material and thread sizes. State enterprises keeps all types of panel fasteners as per customer specific requirements. Panel fasteners are designed to help keep parts to a minimum risk associated with loose hardware that could fall out and damage the internal components. Panel fasteners are hence used to attach metal parts or components in applications where subsequent access is necessary.

PF C2P PANEL FASTENERS

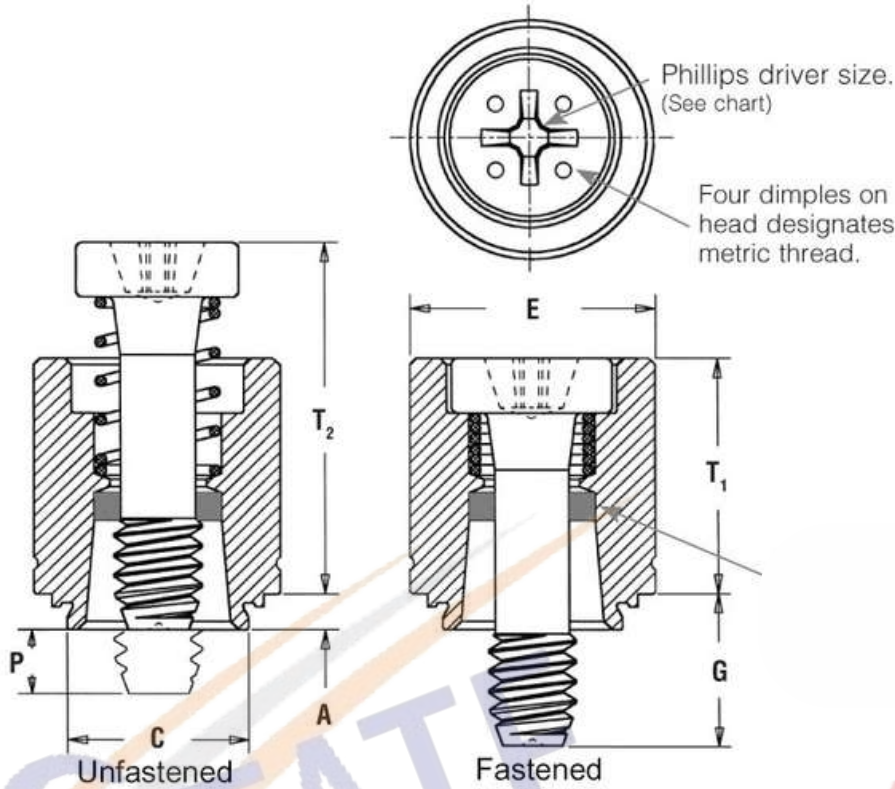

All dimensions are in inches

UNIFIED	Thread Size	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet +.003 -.000	CMax.	E± .010	G± .016	P±.025	T1Max.	T2No m.	Driver Size	Min. Dist. Hole To Edge
	.112-40 (#4-40)	PFC2P	440	40 62	.060	.060	.265	.264	.312	.250 .375	.000 .125	.370	.540	#1	.25
.138-32 (#6-32)	PFC2P	632	40	.060	.060	.281	.280	.344	.250	.000	.380	.540	#2	.28	
			62						.375	.125					
			84						.500	.250					
.164-32 (#8-32)	PFC2P	832	50	.060	.060	.312	.311	.375	.312	.000	.480	.705	#2	.31	
			72						.437	.125					
			94						.562	.250					
.190-32 (#10-32)	PFC2P	032	50	.060	.060	.344	.343	.406	.312	.000	.490	.705	#2	.34	
			72						.437	.125					
			94						.562	.250					
.250-20 (1/4-20)	PFC2P	0420	60	.060	.060	.413	.412	.468	.375	.000	.620	.905	#3	.38	
			82						.500	.125					
			04						.625	.250					

All dimensions are in millimeter

METRIC	Thread Size x Pitch	Type	Thread Code	Screw Length Code	A (Shank) Max.	Min. Sheet Thickness	Hole Size In Sheet + 0.08	CMax.	E± 0.25	G± 0.4	P±0.64	T ₁ Max.	T ₂ No m.	Driver Size	Min. Dist Hole To Edge
	M3 x 0.5	PFC2 P	M3	40 62	1.53	1.53	6.73	6.71	7.92	6.4 9.5	0 3.2	9.4	13.72	#1	6.35
M4 x 0.7	PFC2 P	M4	50	1.53	1.53	7.92	7.9	9.53	7.9	0	12.19	17.91	#2	7.87	
			72						11.1	3.2					
			94						14.3	6.4					
M5 x 0.8	PFC2 P	M5	50	1.53	1.53	8.74	8.72	10.31	7.9	0	12.45	17.91	#2	8.63	
			72						11.1	3.2					
			94						14.3	6.4					
M6 x 1	PFC2 P	M6	60	1.53	1.53	10.49	10.47	11.89	9.5	0	15.75	22.99	#3	9.65	
			82						12.7	3.2					
			04						15.9	6.4					

